


KNUX

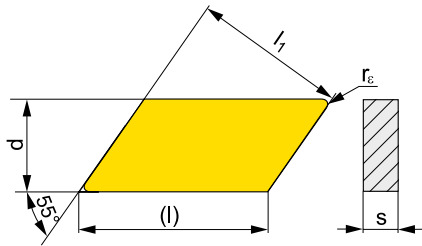

Dimensione Dimension	l	l ₁	d	s		
1604	19,5	16,15	9,525	4,76		

Dimensioni / All dimensions [mm]

Per gli utensili vedere la pag / For tools see pages: 121

Inserto Chip breaker	ISO	Qualità / Grades												Raggio Radius r _e	Avanzamento al giro Feed per rev.		Profondità di taglio Cutting depth	
		T5315	T9325	T9335	6640										f _{min}	f _{max}	a _{p min}	a _{p max}
	KNUX 160405ER-72	■	●	●										0,5	0,15	0,23	0,5	4,0
	KNUX 160405EL-72	■	●	●										0,5	0,15	0,23	0,5	4,0
	KNUX 160405SR-73				●									0,5	0,20	0,30	0,5	4,8
	KNUX 160410SR-73	■			●									1,0	0,20	0,60	1,0	4,8
	KNUX 160405SL-73				●									0,5	0,20	0,30	0,5	4,8
	KNUX 160410SL-73	■			●									1,0	0,20	0,60	1,0	4,8
	KNUX 160415SR-74				●									1,5	0,30	0,70	1,5	4,8
	KNUX 160415SL-74				○									1,5	0,30	0,70	1,5	4,8