

Frese a due taglienti per cave

serie corta

Langlochfräser zweischneidig

kurze Ausführung


Two-flute slot drills

short series

DIN 327

Art. 731S

d1	l1	l2	d2	z
mm	mm	mm	mm	
1.00	47	3	6	2
1.50	47	3	6	2
2.00	48	4	6	2
2.50	49	5	6	2
3.00	49	5	6	2
3.50	50	7	6	2
4.00	51	7	6	2
4.50	51	7	6	2
5.00	52	8	6	2
5.50	52	8	6	2
6.00	52	8	6	2
6.50	60	10	10	2
7.00	60	10	10	2
7.50	60	10	10	2
8.00	61	11	10	2
8.50	61	11	10	2
9.00	61	11	10	2
9.50	61	11	10	2
10.00	63	13	10	2
10.50	70	13	12	2
11.00	70	13	12	2
12.00	73	16	12	2
13.00	73	16	12	2
14.00	73	16	12	2
15.00	73	16	12	2
16.00	79	19	16	2
17.00	79	19	16	2
18.00	79	19	16	2
19.00	79	19	16	2
20.00	88	22	20	2

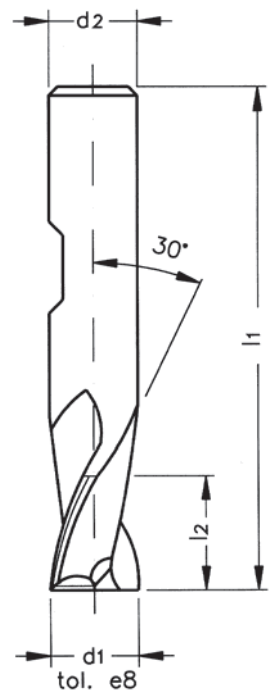

Impiego: Fresatura di scanalature per accoppiamento P9. Adatte per tutti i tipi di acciai, anche tenaci, metalli non ferrosi e plastica.

Verwendung: Zum Fräsen von Nuten in Passung P9. Geeignet für alle Werkstoffe, auch hochfeste Stähle, NE-Metalle und Kunststoffe.

Application: For milling of slots for fitting in P9. Suitable for all kind of steels, even tough steels, non-ferrous metals and plastic.