

PMX-800

Frese cilindriche per sgrossare

serie normale

Schaftfräser Schrupp-Profil

kurze Ausführung

Heavy duty roughing end mills


standard series

DIN 844 K

Art. 599

d1	l1	l2	d2	z
mm	mm	mm	mm	
6.00	57	13	6	4
7.00	66	16	10	4
8.00	69	19	10	4
9.00	69	19	10	4
10.00	72	22	10	4
11.00	79	22	12	4
12.00	83	26	12	4
13.00	83	26	12	4
14.00	83	26	12	4
15.00	83	26	12	4
16.00	92	32	16	4
18.00	92	32	16	4
20.00	104	38	20	4
22.00	104	38	20	4
25.00	121	45	25	6
28.00	121	45	25	6
30.00	121	45	25	6

new
PlusTGV

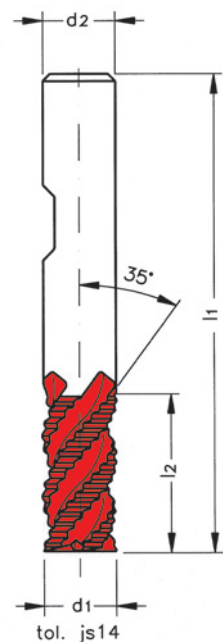

Impiego: Fresatura generale di sgrossatura di acciai tenaci e metalli non ferrosi con $R > 800 \text{ N/mm}^2$, leghe speciali, titanio, inconel.

Verwendung: Zum Vorfräsen von hochfesten Stählen und NE-Metalle über 800 N/mm^2 Festigkeit, Sonderlegierungen, Titan, Inconel.

Application: Rough milling operations. Suitable for tough steels and non-ferrous metals over 800 N/mm^2 , special alloys, titanium, inconel.