

Micrograin carbide

# Frese frontali a tre taglienti, elica a 45°

serie normale

## Schaftfräser dreisneidig, 45° Spiral

kurze Ausführung

## Tree-flute, 45° helix end mills


standard series



DIN 6527

**Art. 668C**

d1	l1	l2	d2	z
mm	mm	mm	mm	
3,00	57	7	6	3
3,50	57	7	6	3
4,00	57	8	6	3
4,50	57	8	6	3
5,00	57	10	6	3
6,00	57	10	6	3
7,00	63	13	8	3
8,00	63	16	8	3
9,00	72	16	10	3
10,00	72	19	10	3
12,00	83	22	12	3
14,00	83	22	14	3
16,00	92	26	16	3
18,00	92	26	18	3
20,00	104	32	20	3

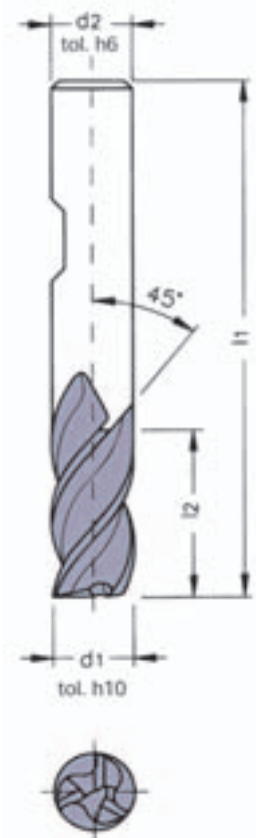

**Impiego:** Fresatura generale e scanalature. Adatte per tutti i tipi di metalli tenaci.

**Verwendung:** Allgemeine Fräsarbeiten und zum Fräsen von Nuten. Geeignet für alle hochfeste Metalle.

**Application:** General milling operations and slots. Suitable for all tough metals.