

Frese cilindriche taglienti al centro

serie normale

Schaftfräser Zentrumschnitt

kurze Ausführung

End mills centre cutting


standard series

DIN 844 K

Art. 672

d1	l1	l2	d2	z
mm	mm	mm	mm	
3,00	52	8	6	3
4,00	55	11	6	3
5,00	57	13	6	3
6,00	57	13	6	3
8,00	69	19	10	4
10,00	72	22	10	4
12,00	83	26	12	4
14,00	83	26	12	4
16,00	92	32	16	4
18,00	92	32	16	4
20,00	104	38	20	4
22,00	104	38	20	5
25,00	121	45	25	5
28,00	121	45	25	6
30,00	121	45	25	6

new
PlusTGV

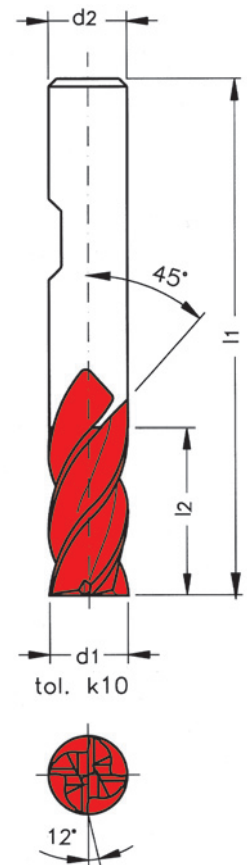

Impiego: Fresatura generale. Adatte per materiali tenaci e metalli non ferrosi con $R > 800 \text{ N/mm}^2$, leghe speciali, titanio, inconel.

Verwendung: Allgemeine Fräsarbeiten. Geeignet für hochfeste Stähle und NE-Metalle über 800 N/mm^2 Festigkeit, Sonderlegierungen, Titan, Inconel.

Application: General milling operations. Suitable for tough steels and non-ferrous metals over 800 N/mm^2 , special alloys, titanium, inconel.