

Special High Speed CX-40

Allargatori a tre taglienti a svasare

codolo cilindrico

Dreischneidige Kegelsenker

Zylinderschaft


Three-flute countersinks

straight shank

DIN 335/C

Art. 870

d1	d3	l1	d2
mm	mm	mm	mm
4.3	1.30	40	4
5.0	1.50	40	4
5.3	1.50	40	4
5.8	1.50	45	5
6.0	1.50	45	5
6.3	1.50	45	5
7.0	1.80	50	6
7.3	1.80	50	6
8.0	2.00	50	6
8.3	2.00	50	6
9.4	2.20	50	6
10.0	2.50	50	6
10.4	2.50	50	6
11.5	2.80	56	8
12.4	2.80	56	8
13.4	2.90	56	8
15.0	3.20	60	10
16.5	3.20	60	10
19.0	3.50	63	10
20.5	3.50	63	10
23.0	3.80	67	10
25.0	3.80	67	10
26.0	3.80	67	10
28.0	4.00	71	12
30.0	4.20	71	12
31.0	4.20	71	12

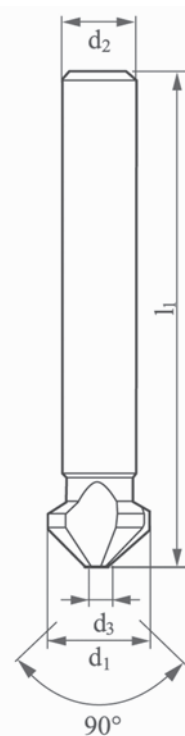

Taglio destro - Spoglia radiale anti-vibrazioni -Tolleranze: diametro d1 z9, diametro d2 h9.

Impiego: Svasature a 90° per sedi viti secondo DIN 1866 di materiali ferrosi e non ferrosi.

Verwendung: Kegelsenker mit festem Führungzapfen 90°, nach DIN 1866, von Eisenmetallen und NE-Metallen.

Application: Screw-head counterboring (90°) DIN 1866 in ferrous and non-ferrous metals.