

Frese cilindriche taglienti al centro

serie lunga

Schaftfräser Zentrumschnitt

lange Ausführung


End mills centre cutting

long series

DIN 844 L

Art. 752S

d1	l1	l2	d2	z
mm	mm	mm	mm	
2.00	54	10	6	4
3.00	56	12	6	4
4.00	63	19	6	4
5.00	68	24	6	4
6.00	68	24	6	4
7.00	80	30	10	4
8.00	88	38	10	4
9.00	88	38	10	4
10.00	95	45	10	4
11.00	102	45	12	4
12.00	110	53	12	4
13.00	110	53	12	4
14.00	110	53	12	4
15.00	110	53	12	4
16.00	123	63	16	4
18.00	123	63	16	4
20.00	141	75	20	4
22.00	141	75	20	5
25.00	166	90	25	5
28.00	166	90	25	6
30.00	166	90	25	6
32.00	186	106	32	6

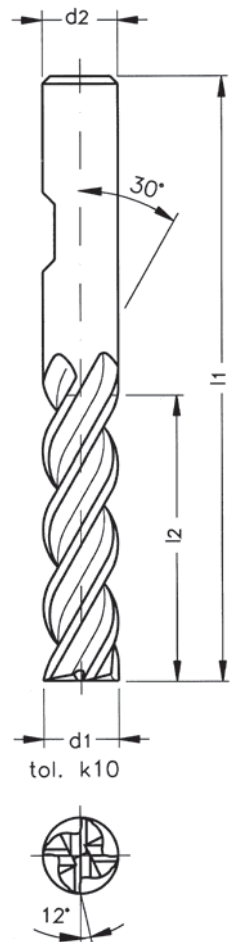

Impiego: Fresatura generale. Adatte per tutti i tipi di acciai, anche tenaci e metalli non ferrosi.

Verwendung: Allgemeine Fräsarbeiten. Geeignet für alle Werkstoffe, auch hochfeste Stähle und NE-Metalle.

Application: General milling operations. Suitable for all kind of materials, even tough steels and non-ferrous metals.